

---

## Energy Management Solutions

Diesel Storage & Dispensing

UK & Ireland

# TITAN

## TruckMaster<sup>®</sup> Product Guide

Diesel Storage & Dispensing Solutions

Available from 200 – 900 litres



[kingspan.com](http://kingspan.com)



**Kingspan**

# Portable Diesel Storage & Dispensing Solutions

Available from 200 – 900 litres

The TruckMaster range has been specifically designed for the safe transportation of diesel fuel. This robust, portable solution offers users the ultimate convenience by allowing them to refuel remotely on-site.

Available from 200 – 900 litres, with a number of specification and dispensing options, the Kingspan Titan TruckMaster range suits a variety of applications including Agricultural, Construction and Forestry. Built from high-quality polyethylene all tanks are resistant to structural damage, changing weather conditions and UV radiation.

Specifically designed for refuelling remotely on-site, these portable tanks are approved

and tested to meet the needs of the European Agreement (ADR) for the international Carriage of Dangerous Goods by Road\*.

The TruckMaster range offers a quality, cost saving and compliant solution backed by excellent technical and customer service support.

## TM430/300 Equipment Specification



1. Tank
2. 12V Pump
3. Automatic nozzle (with optional flowmeter, if required)
4. Pressure relief vent
5. Delivery hose
6. Lockable lid\*\*\*
7. Shackles†
8. 4" Inspection lid††
9. Filling offset†††
10. Internal LED Light†††
11. Gas Strut



## NEW Metal Hinge Technology

## TITAN TruckMaster®

### Features and Benefits

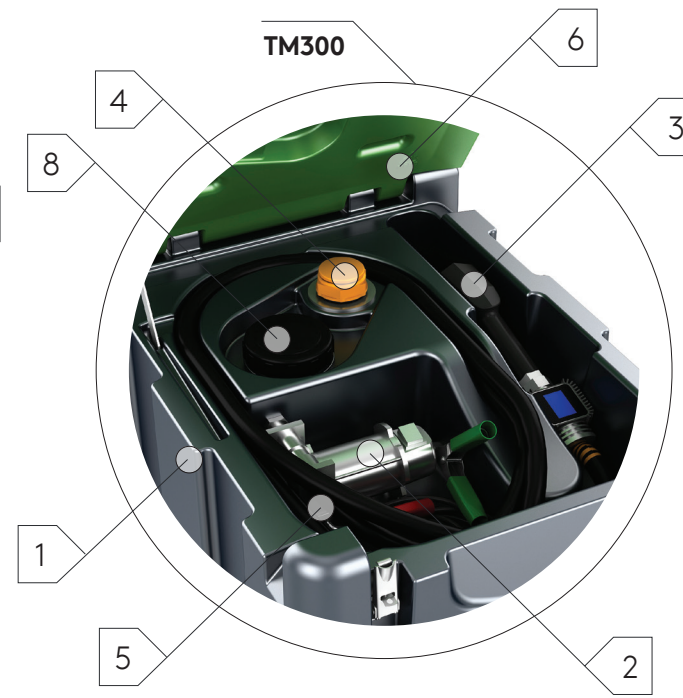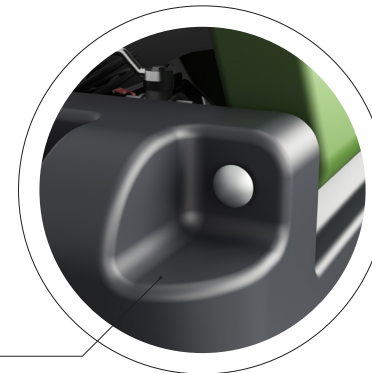

### Environmental Protection

With TruckMaster, on-site safety is assured as diesel can be transported without the requirement of heavy steel drums or jerry cans, which are liable to spill. All dispensing equipment is stored in a secure leak proof area, eliminating the risk of dripping fuel often encountered by an external retrofitted nozzle and hose.



### Easy to Lift

The portable tanks can be easily lifted with its specifically designed lifting eyes or by using a forklift†.

### Efficient Transportation

The 430 and 900 litre models feature an internal baffle wall minimising the movement of liquid hence making the truck and the load more stable when in transit.



### Cost-saving Transportation

The compact 200 and 300 litre models occupy only half a Euro Pallet for more economical distribution and reduced delivery costs. 6 TM200 or 4 TM300 models can be stacked on one pallet.



## Power and Safeguard your Business

- > Over 40 years' experience  
Trust and reliability
- > 5 Year Guarantee\*\*  
Total peace of mind
- > Industry Leading ADR\* Approved
- > Quality Assured  
Certified to ISO 9001, ISO 14001, OHSAS 18001
- > Secure Lockable Lid  
All equipment is stored under the lockable lid\*\*\*

## Model Selector

All dimensions and weights are approximate only

\* 200 and 300 litre models do not require ADR approval due to their smaller capacity

\*\* 5 year warranty applies to tank only

\*\*\* Lid with integrated lock (TM430 and TM900). Lid with lockable latch, padlock not provided (TM200 and TM300)

† Available on TM430 and TM900 as optional extra

†† Available on TM200, TM300

††† Available on TM430 and TM900 as optional extra

‡ Please read further instructions in User Manual

### TM200



Capacity (nominal)	200 litres / 44gal
Length	600 mm
Width	800 mm
Height	620 mm
Weight	33 kg

### TM300



Capacity (nominal)	300 litres / 66gal
Length	600 mm
Width	800 mm
Height	890 mm
Weight	45 kg

### TM430



Capacity (nominal)	430 litres / 95gal
Length	1180 mm
Width	860 mm
Height	910 mm
Weight	64 kg

### TM900



Capacity (nominal)	900 litres / 198gal
Length	1410 mm
Width	1050 mm
Height	1210mm
Weight	97 kg



## Specification Options

## TITAN TruckMaster®

DESCRIPTION / CAPACITY	TM200	TM300	TM430	TM900
Level gauge			●	●
Ball valve on suction line			●	●
Suction line with mesh filter	●	●	●	●
12 V DC pump (max. flow rate 50 l/min*)	●	●	●	●
6 m power cable with battery clamps	●	●	●	●
4 m flexible delivery hose			●	●
3,7 m flexible delivery hose	●	●		
Automatic nozzle	●	●	●	●
Lid with integrated lock			●	●
Lid with lockable latch (padlock not provided)	●	●		
Vacuum and pressure relief valve (VENT)	●	●	●	●
Lid with support gas struts			●	●
4 lifting shackles			○	○
Battery powered LED lamp			○	○
24 V DC pump (max. flow rate 50 L/min*)	○	○	○	○
Digital flowmeter fixed to the nozzle	○	○	○	○

● Standard accessories ○ Optional accessories

\*Maximum across pump flow rate as defined by pump manufacturer.  
Actual flowrate will be less.



### Head Office

#### Kingspan Water & Energy Ltd

180 Gilford Road, Portadown,  
Co. Armagh, BT63 5LF

United Kingdom

T: +44 (0) 28 3836 4444

F: +44 (0) 28 3836 4445

E: tankinfo@kingspan.co.uk

### Ireland Office

#### Kingspan Water & Energy Ltd

Dundalk Road  
Carrickmacross

Co. Monaghan

T: +353 (0) 42 969 0022

F: +353 (0) 42 969 0030

E: tankinfo@kingspan.ie

We take every care to ensure that the information in this document is accurate at the point of publication. Dimensions may vary within a small parameter due to manufacturing process variations or environmental conditions. All images are for illustration purposes only and, along with dimensions, should not be taken as binding. The actual product may vary and aspects such as equipment specification/weight/colour may differ.

To ensure you are viewing the most recent and accurate product information, please visit this link:

<https://www.kingspan.com/gb/en-gb/products/storage-tanks/diesel-storage-tanks>

@Kingspan and the Lion Device are Registered Trademarks of the Kingspan Group in the UK, Ireland and other countries.

All rights reserved. Registered in Country No.NI017631. Registered Office:

180 Gilford Road, Portadown, Co. Armagh, BT635LF. VAT GB412 5124 03

03/2022\_v3\_3060\_gb-ie